



# Rugged, Safe and Efficient Roof Venting

## Superior Airflow Efficiency

**NEW**



Venting the dryer through the roof can help shorten duct run length and improve efficiency. Until now, however, roof terminations were too restrictive or included code-prohibited screens.

Today, you can select roof vents that are specifically designed for the dryer. DryerJacks minimize airflow restriction and meet or exceed code requirements.

### DryerJack 466—Low Profile Efficiency

Laboratory tested to less than 0.01 water column inches of airflow restriction, DryerJacks are efficient. Better airflow performance is achieved through attention to engineering detail including damper curvature, hood size and collar placement.

This model DryerJack is built to last in the U.S. and made from 26 gauge Galvalume®. Model 466, at less than 5" tall, delivers safe venting through the roof **and** low profile aesthetics.

**IMC 504.4 & IRC 1502.3 Compliant**



### DryerJack 486—Extra Clearance

When you need room for high profile tile or to accommodate heavy snowfall, select model DJK486. It's as efficient as model 466 but provides more clearance above the roof.

#### Key DryerJack Benefits

- Flapper Closure Deters Bird and Rodent Entry
- Collar and Curved Damper Maximize Airflow
- Water-tight Collar Doubles Weather Protection
- Rounded Flange Corners and Nail Holes Ease Handling and Installation

#### Unique DJK466 Benefits


- Low Profile Improves Aesthetics
- Hood Design Accommodates Cleaning Tools

#### Unique DJK486 Benefits

- Taller Profile Provides Extra Clearance
- Access Door Accommodates Cleaning Tools



**Made in the USA**

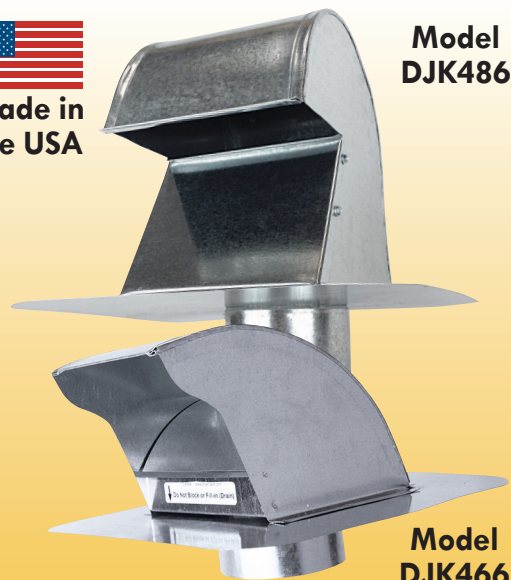

**Model DJK486**

**Model DJK466**



**888-443-7937**

*The Dryerbox®  
People*


**www.DryerJack.com**

250 South Central Boulevard • Suite 207 • Jupiter FL 33458-8812 • Fax: 561-745-9723


# DryerJack

## Technical Product Specifications

### DryerJack Model 466

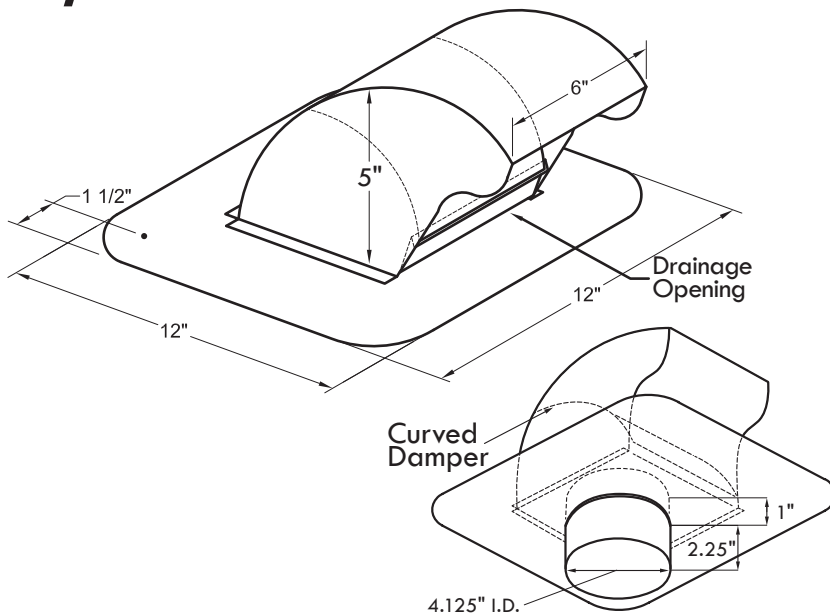

### DryerJack Model 486

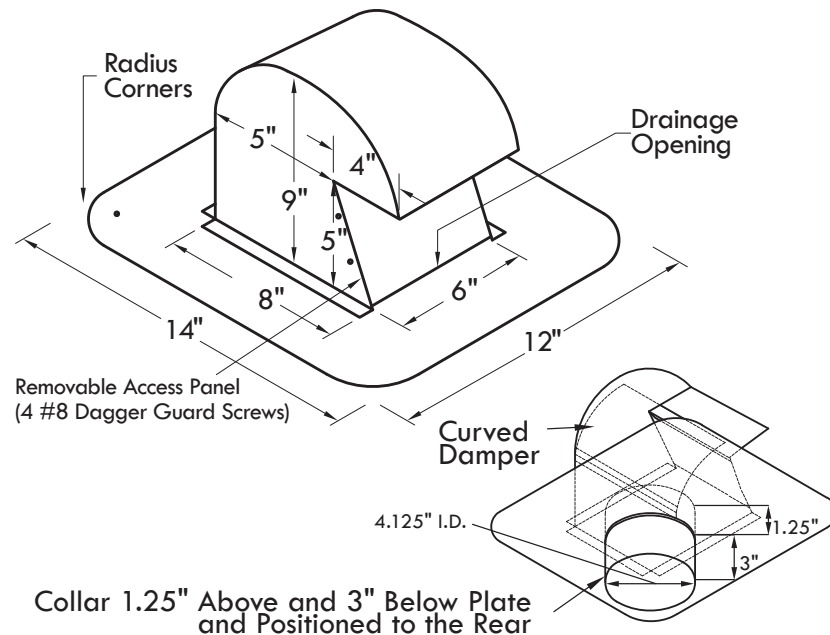

Model	Applications
DJK466	Low profile, efficient termination for safely venting the dryer through the roof.
DJK486	Extra clearance model for high profile tile or heavy snowfall zones.

#### Performance Data

- For Use:**
- Non-restrictive dryer roof vent termination
  - Complies with IMC 504.4 & IRC 1502.3

- Material:**
- 26 gauge Galvalume®
- Weight Each:**
- DJK466 / 3 lbs. — DJK486 4 lbs.

#### General Information

- Benefits:**
- Venting through the roof can shorten duct length
  - Improved efficiency shortens cycles, saves energy
  - Damper design deters bird and rodent entry
  - Access features ease duct cleaning & maintenance

- Features:**
- Rugged 26 gauge Galvalume
  - Rounded corner nailing flange and 6 nail holes
  - Equally suitable for new and retrofit construction
  - Watertight extended collar for secure docking

#### Manufactured By

**InOvate Technologies, Inc.**  
 250 S. Central Blvd. Suite 20  
 Jupiter, FL 33458  
 Telephone: 561-743-8696  
 Facsimile: 561-745-9723  
 www.DryerJack.com

 **Made in the USA**

### Airflow Restriction Comparison (Back Pressure Measured in Water Column Inches)

				
DryerJack Model 466 0.001	DryerJack Model 486 0.02	Low Profile Plastic .35	Low Profile Metal .30	Four Inch Gooseneck .45